


# HIGH SPEED DOORS

LBS OFFER A WIDE RANGE OF SPEED DOORS STARTING AT ENTRY LEVEL, INTERNAL USE WIND CLASS 0 ROLLING AT 0.8M/S INCREASING IN SPECIFICATION AND SPEED UPTO WIND CLASS 4 AND 1.5M/S RESPECTIVELY. LBS' DIFFERENT SPECIFICATIONS AND CHOICE INCLUDE ROLL-UP, ZIP-UP & FOLD-UP ALLOWING US TO PROVIDE IN EXCESS OF 108 METERS SQUARED, USING FRAMES COMPRISED OF GALVANIZED OR STAINLESS STEEL & ALUMINIUM COMBINED WITH OUR 730GR - 12MM 1200GR INSULATED PVC CURTAINS FOR APPLICATIONS IN ALL AREAS.

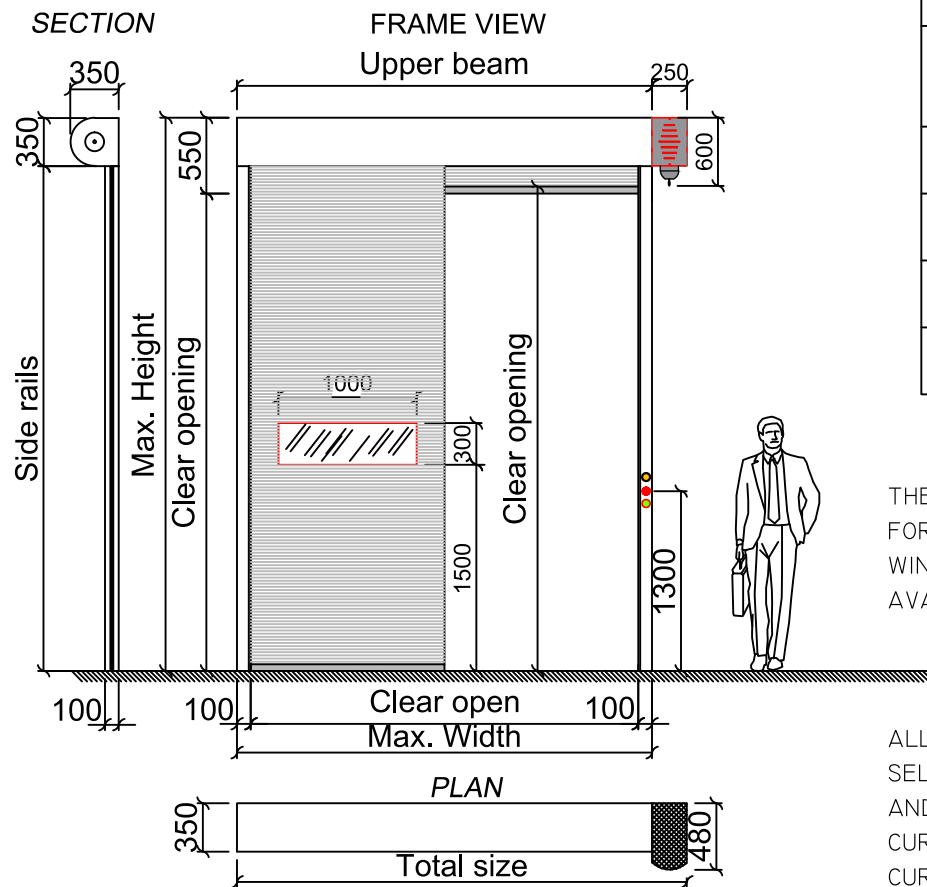

WINDOWS	
CLEAR OPENING WIDTH	No OF WINDOWS
1050-2100	1
2110-4250	2
4260-5990	3
6000-7000	4

THE ABOVE IS A GENERAL GUIDE FOR OUR STANDARD PVC CRYSTAL WINDOWS OTHER SIZES ARE AVAILABLE UPON REQUEST.

### SAFETY

ALL OUR CURTAINS ARE MADE FROM SELF-EXTINGUISHING MATERIALS AND INCORPORATE A LIGHT CURTAIN TO RESTRICT THE CURTAINS MOVEMENT IN THE CASE OF AN OBSTRUCTION.

\* THE ABOVE DRAWING AND DIMENSIONS ARE GENERIC RELATE TO THE LBS AUTO FULL HSD \*

LBS HIGH SPEED DOOR MATRIX							
PRODUCT	TIPOLOGY	WIND CLASS / MAX DIM (mm)	SPEED	FRAME	NOTE	TECHNICAL FEATURES	CURTAIN
LBS REVERSE HSD	ROLL UP INTERNAL USE ENTRY LEVEL	CL 0 3300X3350	0.8 M/S	GALVANIZED STAINLESS STEEL AISI 304 OR 316 PAINTED	NO FRONTAL MOTOR NO COUNTER WEIGHT NO LOW CONTROL PANEL	INTERGRATED 1PH PANEL ON 230V GEAR MOTOR, SAFETY DEVICES: LIGHT CURTAIN INTERGRATED PUSH BUTTON	730GR WHOLE HORIZONTAL TRANSPARENT SECTOR WINDOWS
LBS AUTO BASIC HSD	ROLL UP ZIP DOOR INTERNAL USE SELF REPAIRING	CL 2 5000X5000	1.5 M/S	GALVANIZED ALUMINIUM STAINLESS STEEL AISI 304 OR 316 PAINTED	NO UPPER BEAM COVER NO MOTOR COVER NO FRONTAL MOTOR	INTERGRATED 1PH PANEL ON 230V GEAR MOTOR, SAFETY DEVICES: LIGHT CURTAIN INTERGRATED PUSH BUTTON OPTIONAL LOW CONTROL PANEL	1200GR WINDOWS 700X900 mm
LBS ROLL.2.0 HSD	ROLL UP ZIP DOOR INTERNAL/EXTERNAL USE MANUALLY REPAIRING	CL 2 5000X5000	1.2 M/S	GALVANIZED ALUMINIUM STAINLESS STEEL AISI 304 OR 316 PAINTED	NO FRONTAL MOTOR	400V MOTOR WITH 3PH LOW CONTROL PANEL SAFETY DEVICES: LIGHT CURTAIN	1200GR WINDOWS 700X900 mm
LBS AUTO FULL HSD	ROLL UP ZIP DOOR INTERNAL/EXTERNAL USE SELF REPAIRING	CL 2 5000X5000	1.5 M/S	GALVANIZED ALUMINIUM STAINLESS STEEL AISI 304 OR 316 PAINTED	NO FRONTAL MOTOR	INTERGRATED 1PH PANEL ON 230V GEAR MOTOR, SAFETY DEVICES: LIGHT CURTAIN INTERGRATED PUSH BUTTON OPTIONAL LOW CONTROL PANEL	1200GR WINDOWS 700X900 mm
LBS MINIBIG HSD	BIG SIZE FOLD UP DOOR EXTERNAL USE WINDY AREA GREATER THERMAL AND ACOUSTIC RESISTANCE	CL4 7600X7400 CL2 14600X7400	0.8 M/S	GALVANIZED STAINLESS STEEL AISI 304 OR 316 PAINTED	DOUBLE CURTAIN NO SELF SUPPORTING FRAME	400V MOTOR WITH 3PH LOW CONTROL PANEL SAFETY DEVICES: LIGHT CURTAIN	730GR No 2 ROWS OF WINDOWS 300X1200mm
LBS AUTO FRIGO HSD	ROLL UP ZIP DOOR, INSULATED, CHILL ROOM UNTIL -10°C	CL2 4000X4500	1.2 M/S	GALVANIZED STAINLESS STEEL AISI 304 OR 316	CERTIFIED U/VALUE	INTERGRATED 1PH PANEL ON 230V GEAR MOTOR, SAFETY DEVICES: LIGHT CURTAIN INTERGRATED PUSH BUTTON OPTIONAL LOW CONTROL PANEL	1200GR WITH INSULATION INSIDE MAXIMUM THICKNESS 12mm NO WINDOWS