
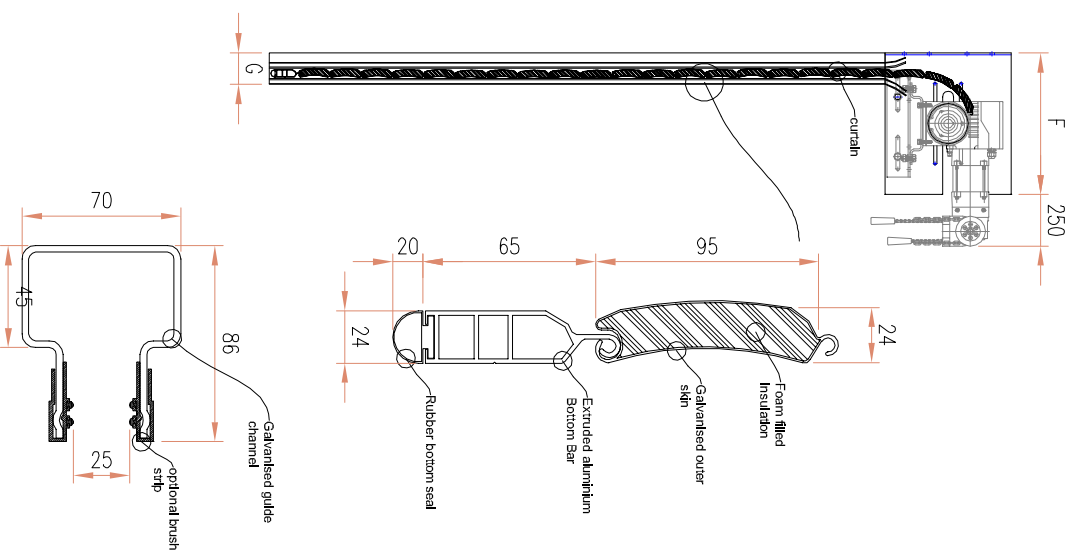


Casing not shown for clarity, but is available as an option.

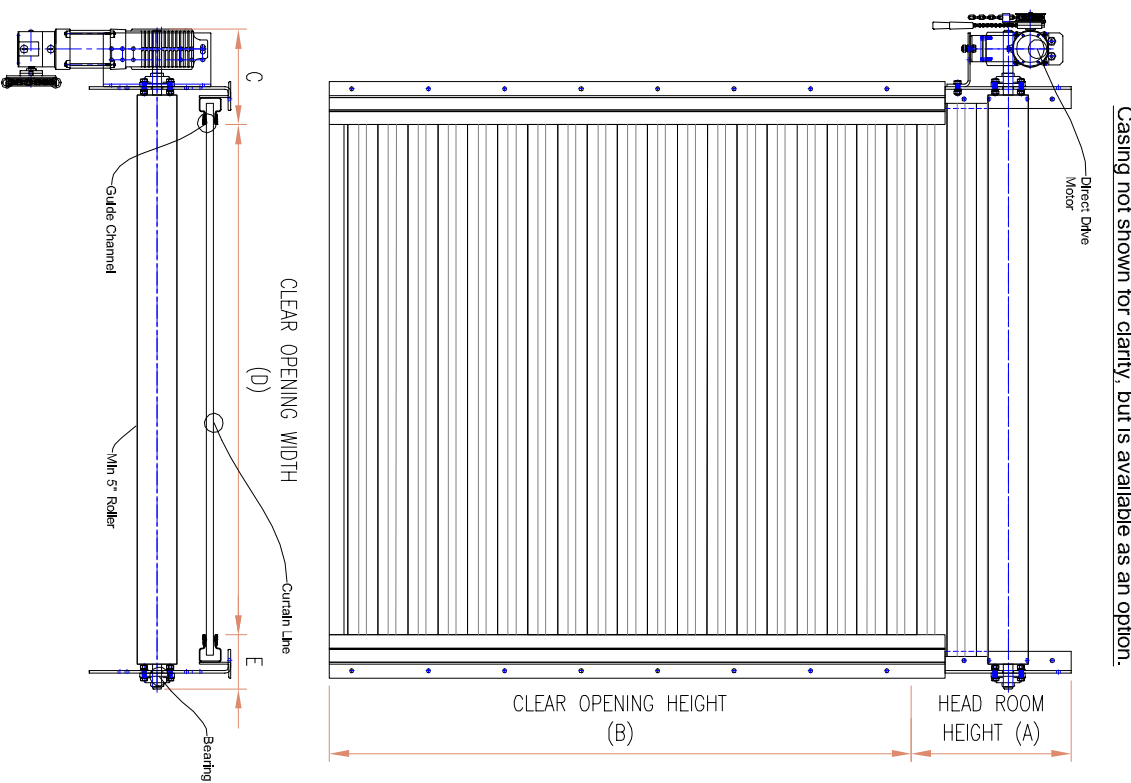

LBS INSUGUARD.

THE LBS INSUGUARD CONSISTS OF A STRONG LIGHT WEIGHT PU INSULATION BONDED TO A UNIQUE EXTRUDED ALUMINIUM PROFILE. OFFERING A LEVEL DIFFERENCE OF 22DB, CATEGORY 5 WIND LOAD AND THERMALLY TESTED TO 3.3w/m2k BUT ONLY WEIGHS IN AT 11.3kg/m²

THIS CAN BE OFFERED WITH A RANGE OF DRIVE APPLICATIONS FROM DIRECT TO FLANGE MOUNTS. A WIDE RANGE OF POLYESTER POWDER COATING COVERING ALMOST ALL RAL COLORS AS AN EXTRA. AUTOMATED OPTIONS AVAILABLE.

HEAD BOX SIZE

HEIGHT (MM)	SIZE (MM ²)
2500	360
3000	400
3500	420
4000	460
4500	460
5000	460
5500	500
6000	500

The above guidance dimensions are subject to site surveys carried out by an LBS Group representative in conjunction with the correct specifications supplied by our client.

PRODUCT: LBS INSUGUARD

DATE: 12.12.2019

DRAWN BY: JS

LBS GROUP GENERIC DRAWINGS

REVISION No: 1A
DRAWING No: LBS019

Approved:

LBS GROUP
UNIT 6 STERLING
INDUSTRIAL ESTATE
RAINHAM ROAD
SOUTH
DAGENHAM
ESSEX
RM10 8TX

