

ALL SUPPORTING STRUCTURES ARE EXISTING OR BY OTHERS. FULL WIDTH ACCESS SHOULD ALWAYS BE AVAILABLE FOR SERVICE, REPAIR OR MAINTENANCE PURPOSES. HIGH LEVEL SUPPLY ISAMP /PHHNE TO BE AVAILABLE ADJACENT AND WITHIN 1 METER OF THE ROLLER SHUTTER MOTOR BY OTHERS. WEIGHTS ARE CALCULATED DEPENDANT ON CONFIRMATION OF DIMENSIONS.

The above guidance dimensions are subject to site surveys carried out by an LBS Group representative in conjunction with the correct specifications supplied by our client.

PRODUCT: LBS VIEWGUARD 75

DATE: 12.12.2019


DRAWN BY: JS

LBS GROUP GENERIC DRAWINGS


REVISION No: 1A
DRAWING No: LBS024

Approved:


LBS GROUP
UNIT 6 STERLING
INDUSTRIAL ESTATE
RAINHAM ROAD
SOUTH
DAGENHAM
ESSEX
RM10 8TX



75MM CURVED PROFILE LATH COMPLETE WITH 3MM PERFORATION, PROVIDING 26% FREE AIR FLOW AVAILABLE IN 20-22 GAUGE COMPRISED FROM GALVANISED STEEL SHEET.



75MM CURVED PROFILE LATH COMPLETE WITH 6MM PERFORATION, PROVIDING 29% FREE AIR FLOW AVAILABLE IN 20 GAUGE COMPRISED FROM GALVANISED STEEL SHEET.

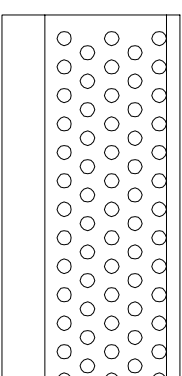

Fixing Guidance	Side and Headroom Guidance
Steel M6-M10 Set screws or Hex bolts	Height Slideroom (each side) Endplate Height (ordinary coil)
Masonry M8-M10 Rawlbolts/ Sleeve anchors	<1000 70 230
Timber 12swg screws / M8-M10 Coach screws	1000-1800 90 255
Concrete 12swg screws / M8-M10 Rawl bolts or Sleeve anchors	1800-2100 100 280
	2100-2700 100 305
	2700-3300 100 330
	3300-4200 115 355

THE ABOVE IS FOR GUIDANCE ONLY. SIDEROOM CAN INCREASE DEPENDANT ON SPECIFICATIONS REQUESTED BY THE CLIENT

THE ABOVE DIMENSIONS ARE IN MILLIMETERS AND ARE THE MINIMUM AVAILABLE. REVERSE COLLING THE CURTAIN WILL INCREASE THE HEADROOM REQUIRED. CORRECT UP TO 4.5M WIDE.