

LBS PROPARK ROLLING CAR PARK GRILLE

Aluminium constructed rolling car park grille with inbuilt anti fall back device. Requisite safeties included in line with Machine Directive – 2006/42/EC.

SUPPLY:

415V 3Ph 16Amp Commando socket with rotary isolator for plug and play facility located within 1 meter of the motor. Additional cable runs if required by others.

CONTROLLER:

All controls by GFA. TS981 with incorporated push buttons and designated termination for compatible safety components. GFA Drive Motor (specified by GFA after approval of dimensions).

ACTIVATIONS:

Dominant activations as per clients request. On activation of safeties, operations are as follows:



- Anti entrapment – AUTO STOP. The shutter will not continue until obstruction has been removed and a new command is given.
- Anti collision – AUTO RETURN. The shutter will immediately return to the open position and begin time out sequence again.
- RESISTIVE SAFETY EDGE – AUTO RETURN. The shutter will immediately return to the open position and begin time out sequence again.

MANUAL OPERATION:

By manual hand chain with low level change over.

WEIGHTS:

Overall shutter weight Approx. 18kg/M²

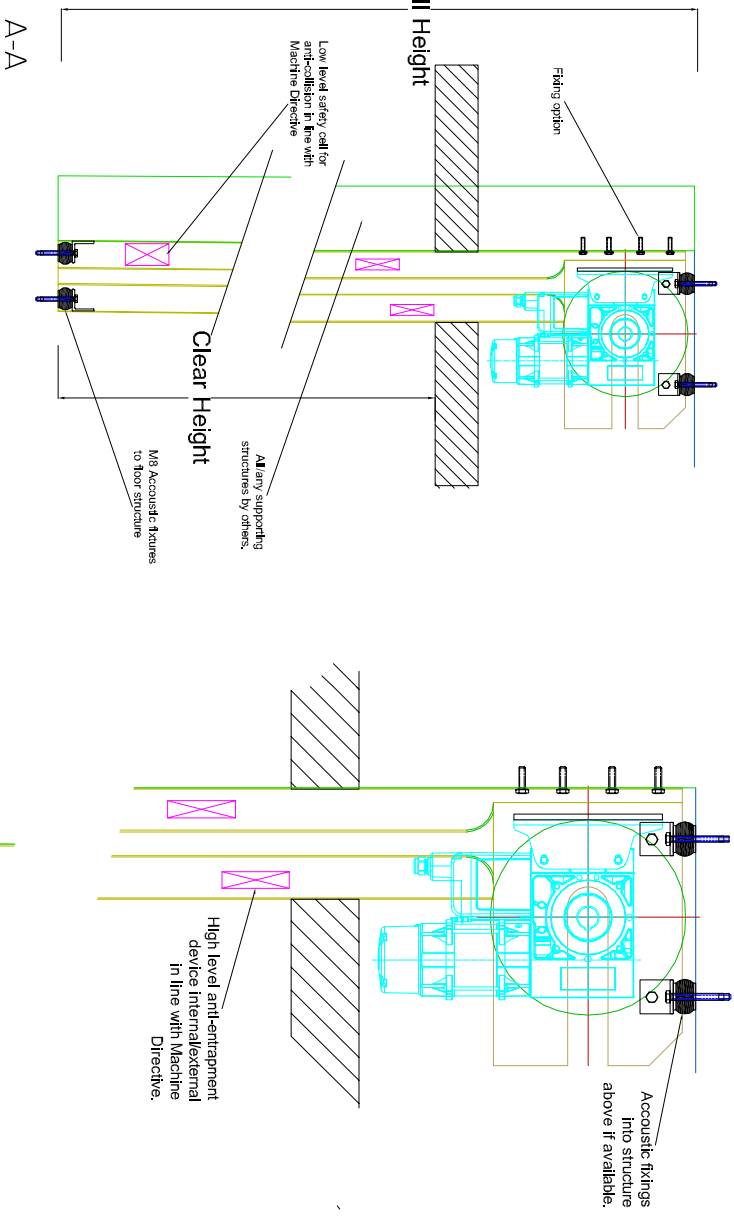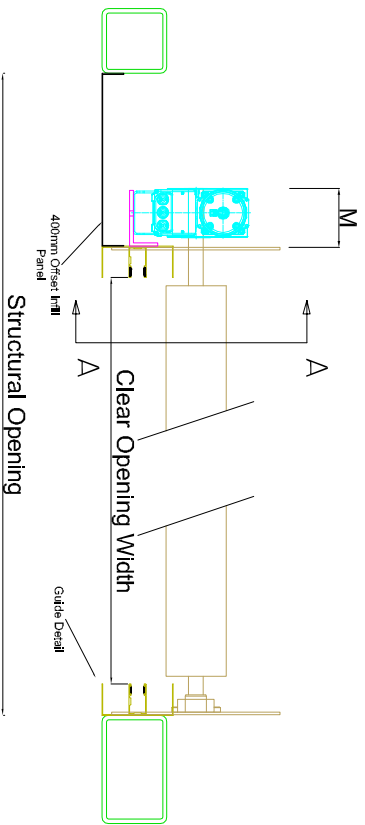

PRODUCT: LBS PROPARK HONEYCOMB GRILLE

DATE: 12.12.2019

DRAWN BY: JS

LBS GROUP GENERIC DRAWINGS

REVISION No: 1 A
DRAWING No: LBS023

Approved:

LBS GROUP
UNIT 6 STERLING
INDUSTRIAL ESTATE
RAINHAM ROAD
SOUTH
DAGENHAM
ESSEX
RM10 8TX

